



Company Profile 公司简介



Shanghai Ketchview Printing Machinery Co.,Ltd/ JiangSu Ketchview Machinery Technology CO., LTD is the specialized manufacturer of screen printing machines. We have been deeply cultivated in the fields of spot UV varnish coating, silk screen cold foil stamping, hologram transfer, water transfer for high/low temperature wine label and sports equipment, heat transfer label, garment mark and hang tag printing technology for many years. With its excellent quality and professional service, it is deeply favored by customers at home and abroad. In the development of China's screen printing, we continue to contribute our own strength.

上海耕驰印刷机械有限公司/江苏耕驰机械科技有限公司是专业的丝网印刷设备制造商，主要在局部丝印UV上光，丝印冷烫，镭射转移，高/低温酒标，运动器材水标转印，热转印烫画，服装唛头，吊牌印刷工艺领域深耕多年，以其优秀的品质，专业的服务，深受国内外客户的青睐。在中国丝网印刷的发展道路上，不断贡献自己的力量。



销售公司 Office

上海耕驰印刷机械有限公司

Shanghai Ketchview Printing Machinery CO., LTD

地址：上海市嘉定区安亭镇墨玉路28号
嘉正国际大厦2218-2219室

Add: Room 2218, Jiazheng Int'l Bldg,
Shanghai 201805, China

Tel: +86 021-59591190 +86 138 1291 1758(Gin Wang)

Email: gin@ketchview.com
info@ketchview.com

制造工厂 Factory

江苏耕驰机械科技有限公司

JiangSu Ketchview Machinery Technology CO., LTD

地址：江苏省东台市富安镇工业园区
富源大道188号


Add: No. 188, Fuyuan Avenue,
Dongtai City, Jiangsu Province 224221, China

Tel: +86 0515-60605188 +86 18621735522(顾从伍)

Email: gin@ketchview.com
info@ketchview.com



包装行业丝印生产线 Screen Printing for Package Industry

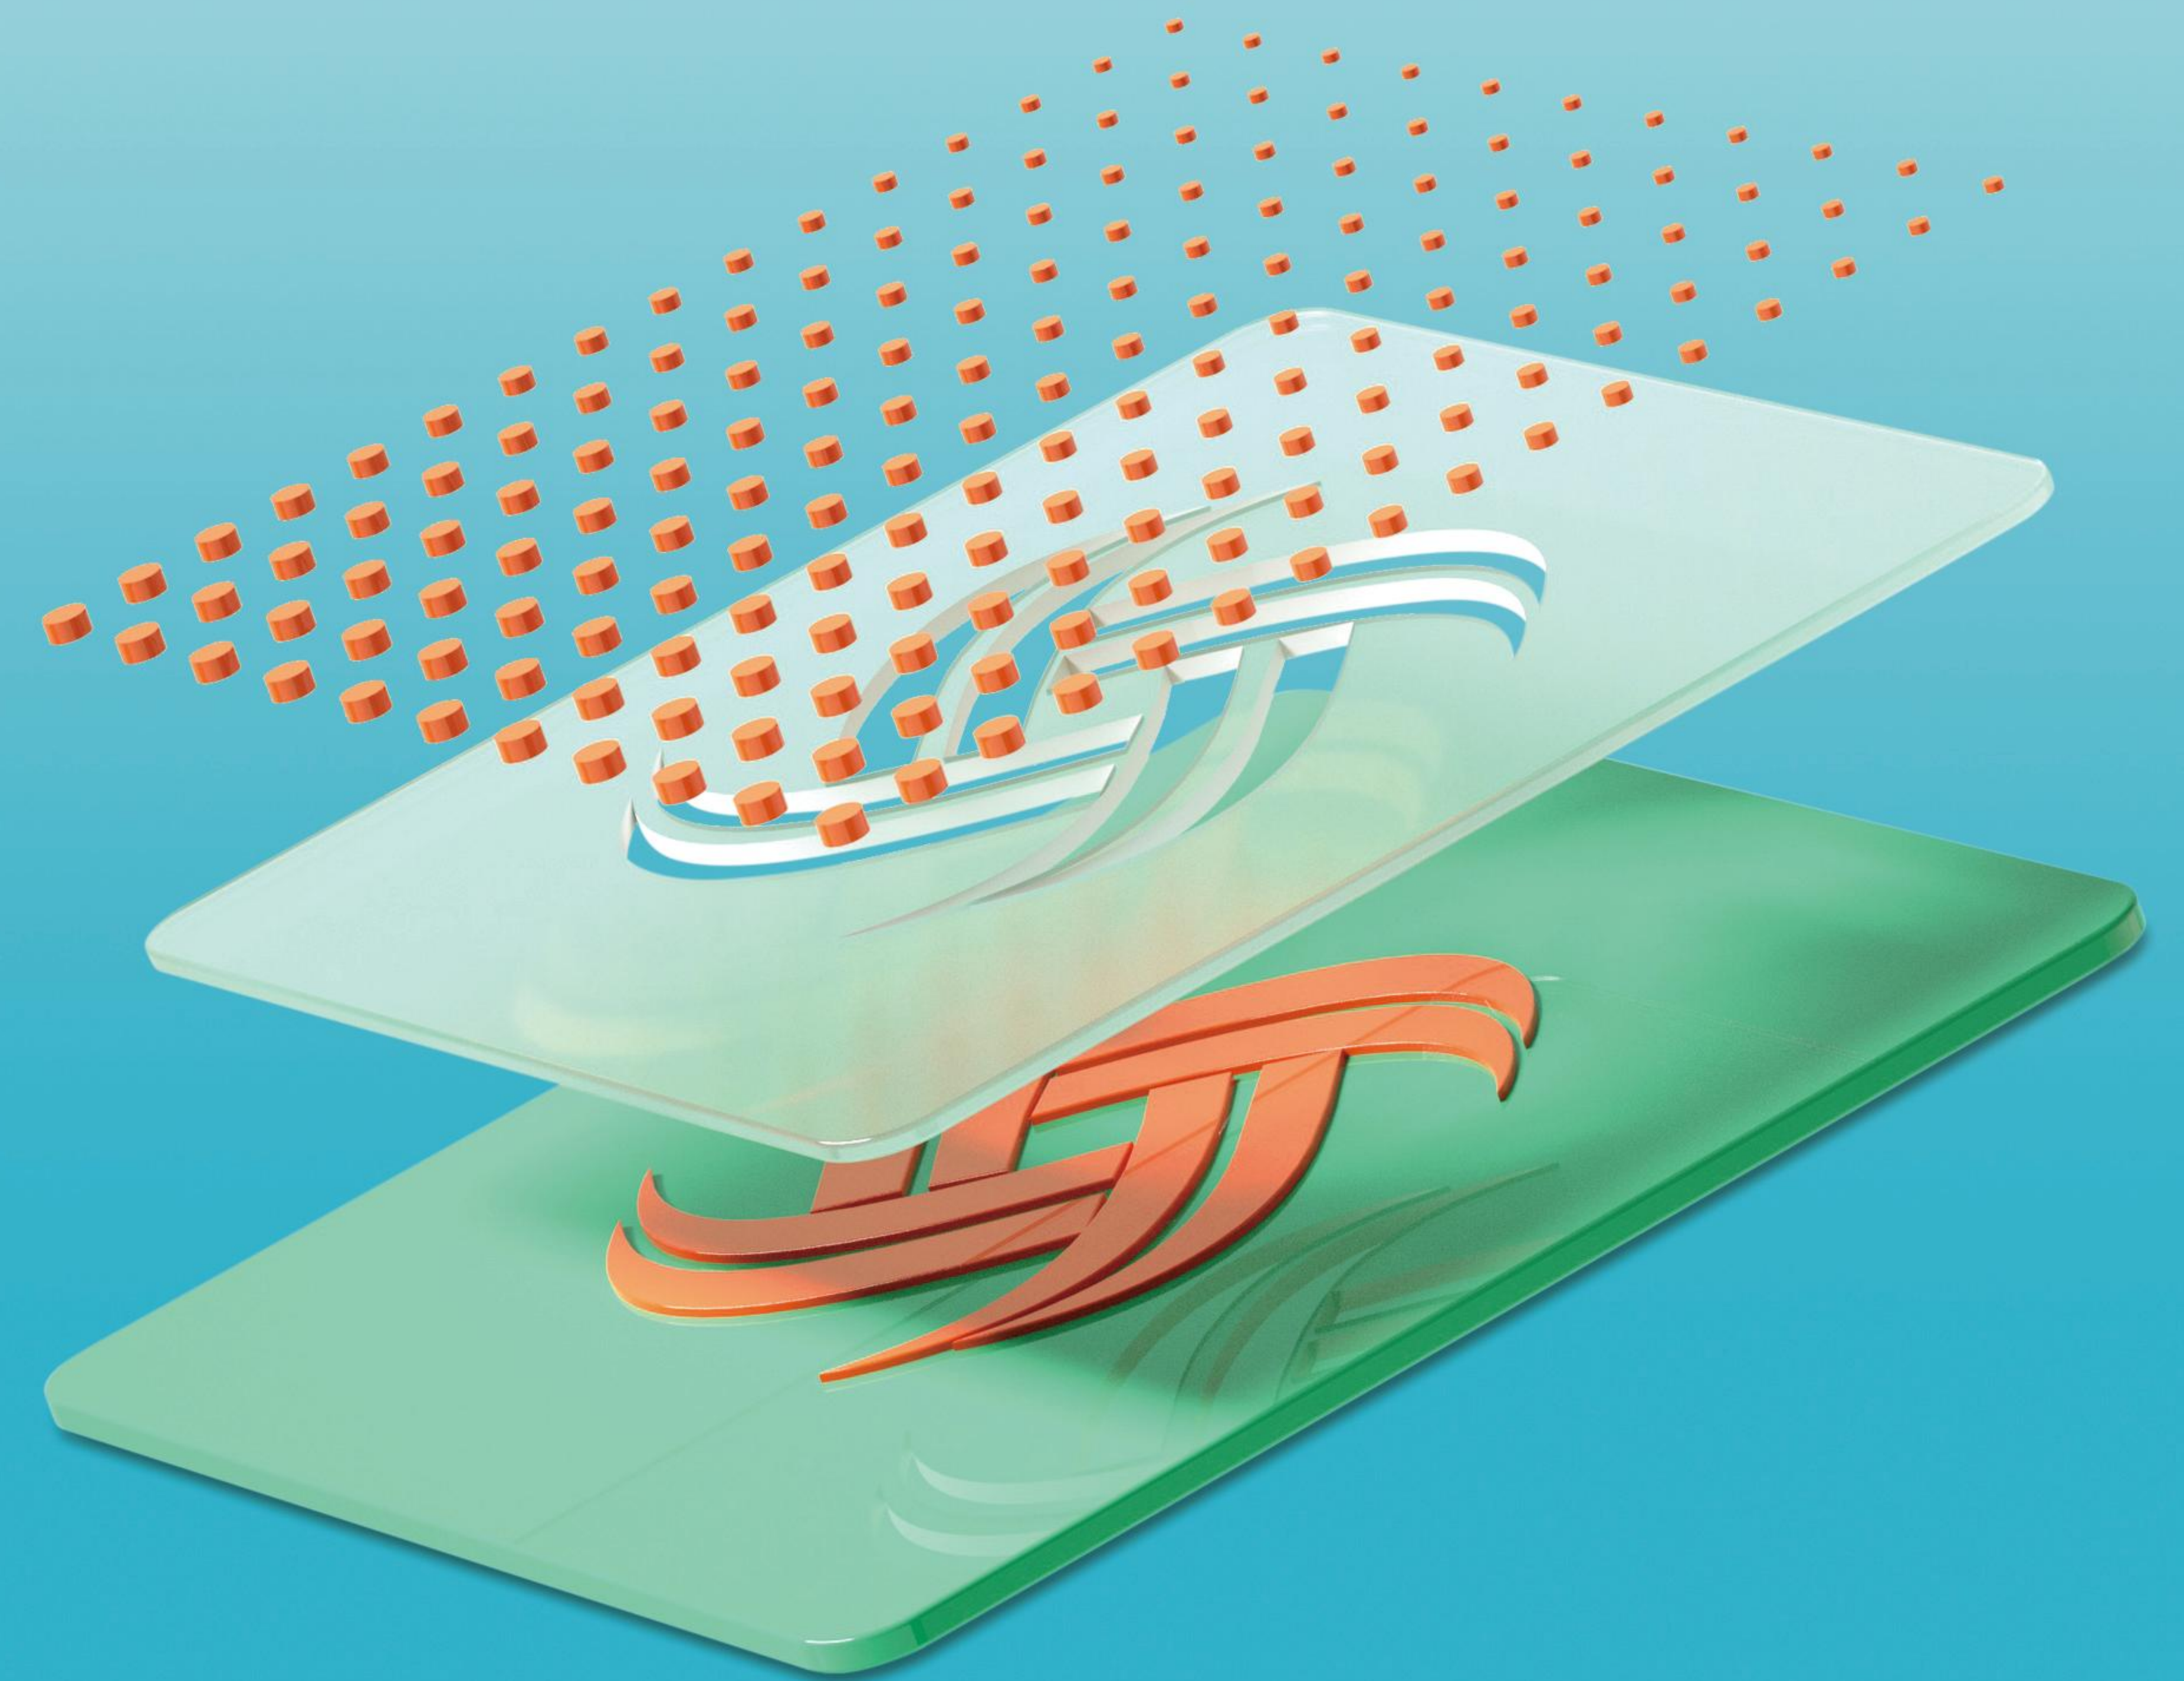

江苏耕驰机械科技有限公司

www.ketchview.com

Automatic Screen Printing Spot UV &
Cold Foil Stamping & Hologram Transfer Line
全自动丝印局部UV&冷烫&镭射生产线


丝印冷烫是近年来兴起的一种印刷工艺，在印刷行业中发挥着越来越重要的作用。丝网印刷烫金结合了丝网印刷的高附着力和烫金的质感，可以达到手感强、有光泽的效果，印刷工艺应用范围广，适用于烟酒包装、化妆品、药盒、礼品盒等，在提高印刷质量和效果方面具有很大的潜力，越来越受到市场的欢迎。

Cold foil stamping is an emerging printing process in recent years, and they are playing an increasingly important role in the printing industry.
Screen printing cold foil stamping combines the high adhesion of screen printing and the texture of foil stamping, which can achieve the strong hand feeling, shiny effect.
The printing process has a wide range of applications, which is suitable for tobacco and alcohol packaging, cosmetics, medicine boxes, gift boxes, and has great potential in improving the quality and effect of printing and becoming more and more popular in the market.

Application 应用



GUVY-76/106 series

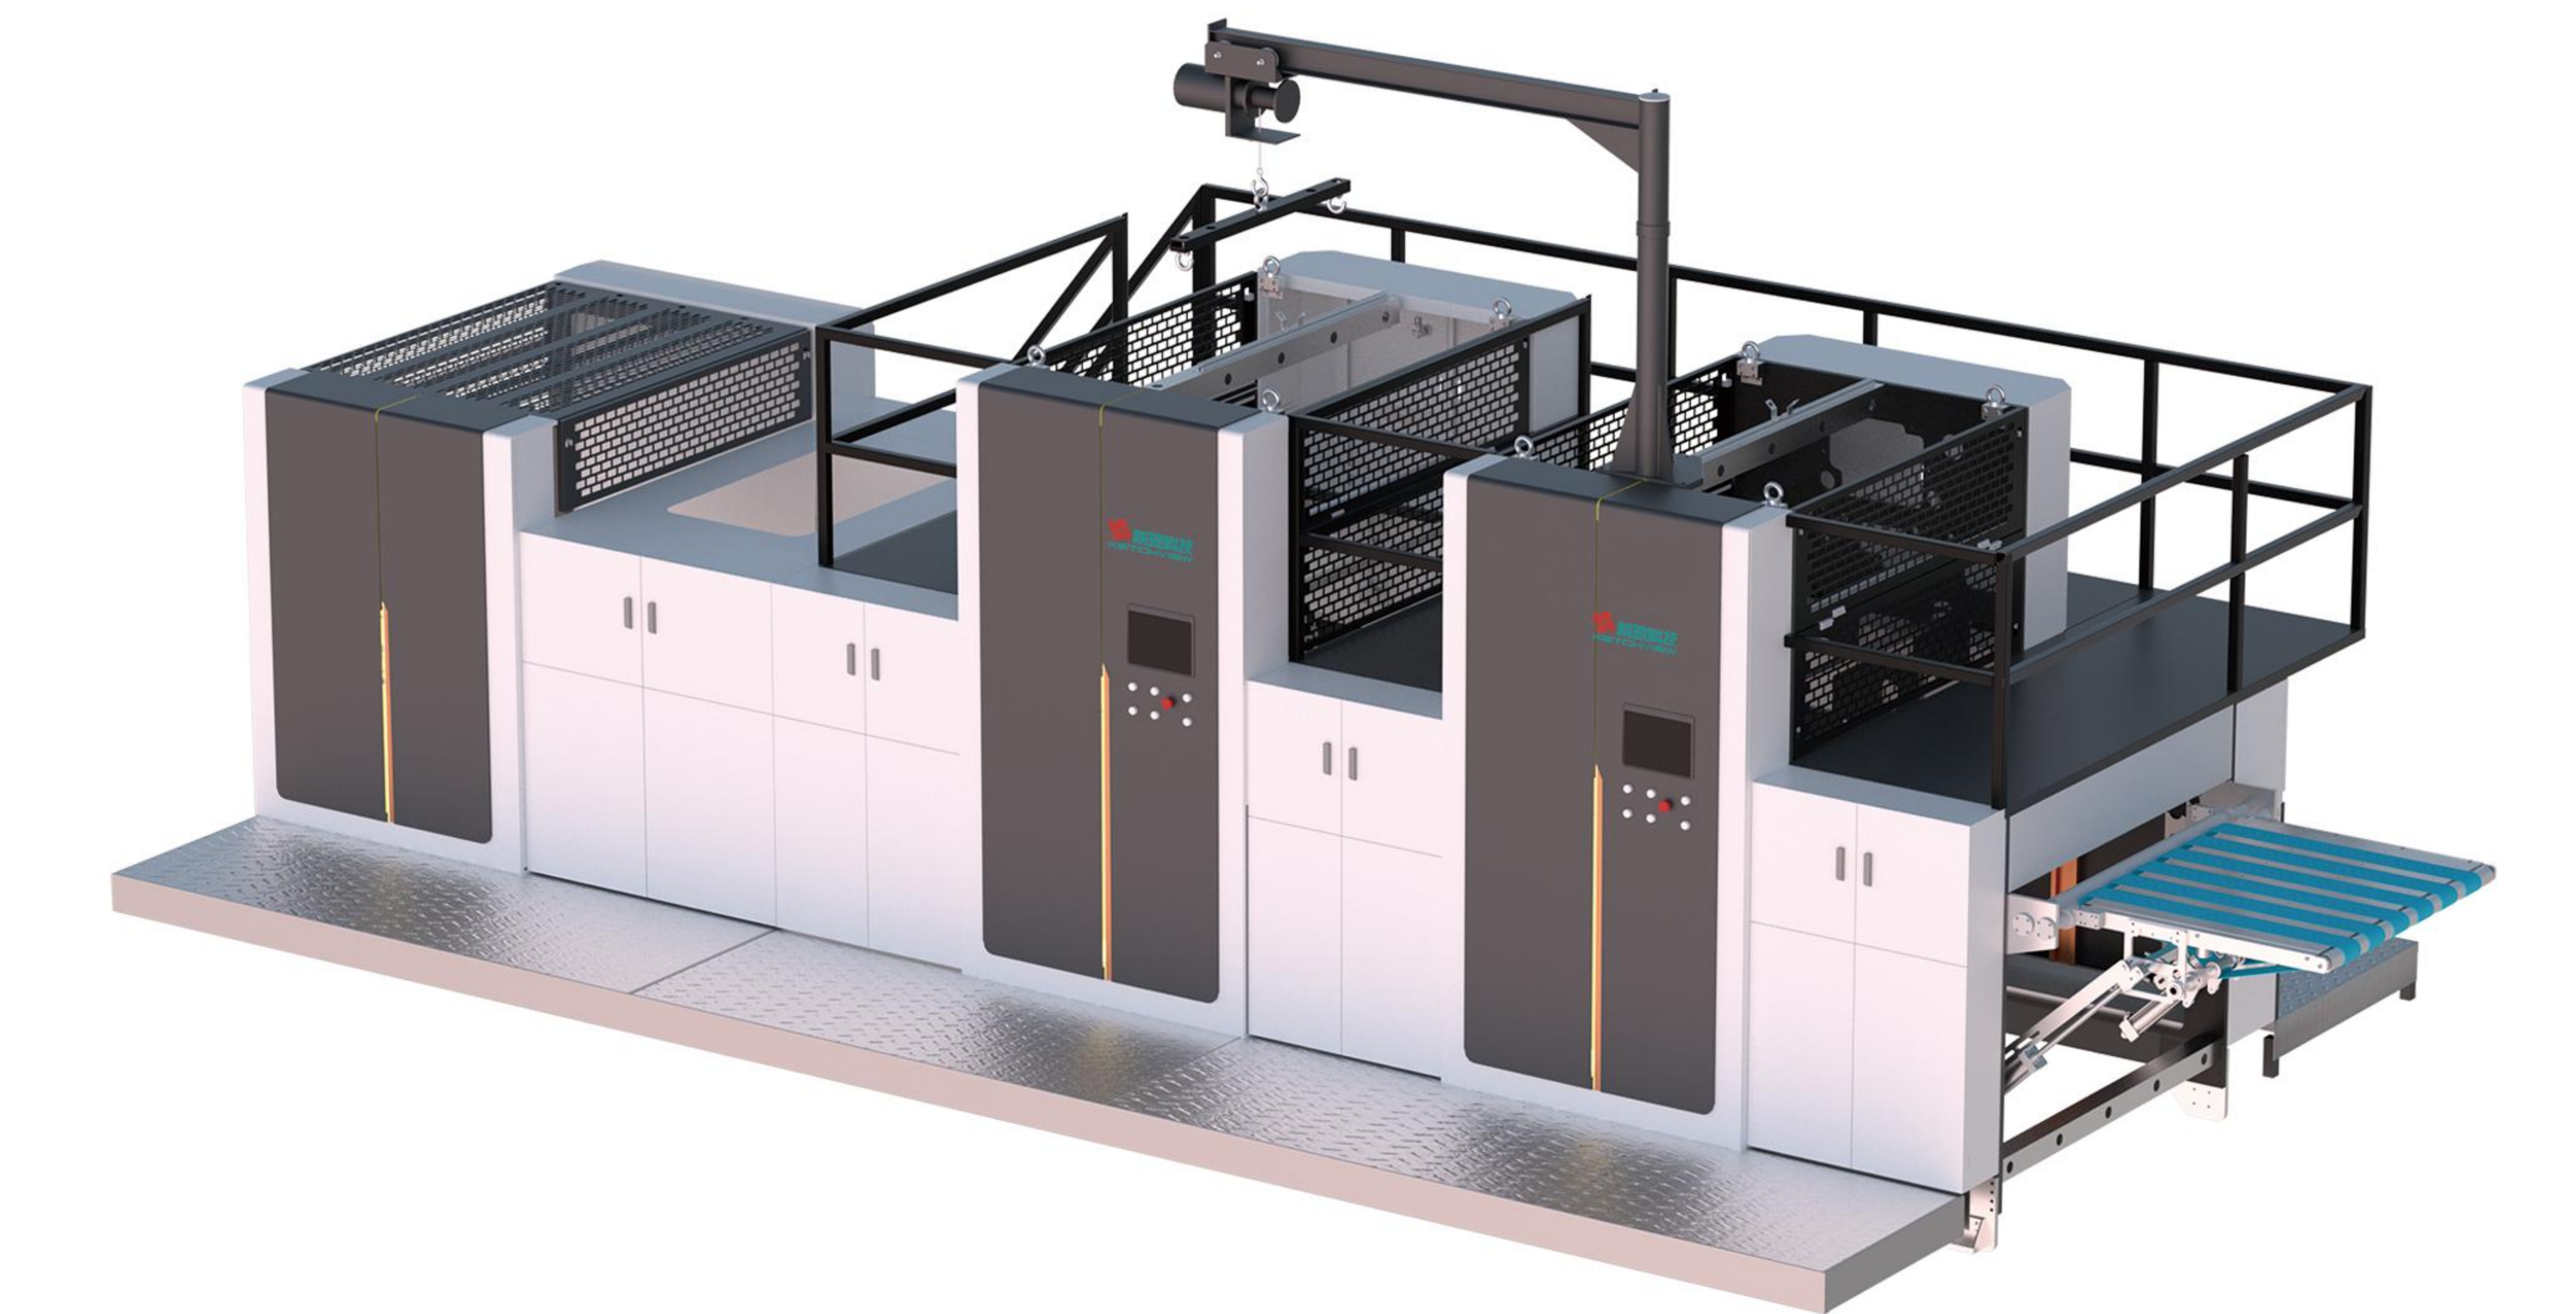

Technicial parameter 技术参数

Model 模型	GUVY-76AS	GUVY-106AS	GUVY-76CS	GUVY-106CS	GUVY-76ACS	GUVY-106ACS
Function 功能	Hologram/cast&cure, UV coating 镭射转移, UV上光		Cold foil stamping, UV coating 冷烫, UV上光		Hologram/cast&cure, Cold foil stamping, UV coating 镭射转移, 冷烫, UV上光	
Max.Working size 最大工作幅面(mm)	760X540	1060X740	760X540	1060X740	760X540	1060X740
Min.Working size 最小工作幅面(mm)	546X393	546X393	546X393	546X393	546X393	546X393
Max.Printing size 最大印刷面(mm)	750X530	1030X730	750X530	1030X730	750X530	1030X730
Paper thickness 纸张重量(g)	90-450	90-450	128-450	128-450	128-450	128-450
Max.Diameter of Film 膜料最大直径(mm)	φ500	φ500	φ400	φ400	φ400	φ400
Max.width of Film 膜料最大宽度(mm)	760	1060	760	1060	760	1060
Max.speed 最高速度(pcs/h)	4000	4000	4000	4000	4000	4000
Outer Dimensions 外形尺寸(m)	6.9×2.7×3.3	7.0×3.0×3.8	6.4×2.7 ×3.3	6.6×3.0 ×3.8	8.4×2.7 ×3.3	9.0×3.0 ×3.8
Total Weight 总重量(T)	≈4.6	≈6.3	≈4.3	≈6	≈10.4	≈10.4

Remark:
The maximum speed depends on the paper size and stamping size, UV varnish, cold foil, and holographic foil
最高机械速度视纸张规格, 烫金长度, UV油, 冷烫/镭射膜的情况而定

GST1050 Automatic Screen Printing Spot UV Production Line

GST1050 全自动丝印局部UV生产线



GST Series Automatic Stop Cylinder Screen Printing Machine

GST系列全自动停回转丝网印刷机



GST系列全自动停回转丝网印刷机，吸收了成熟的胶印机技术，引进了先进的设计和生产技术，不仅能实现对UV光油的局部上光功能，还能对各种UV色墨进行单色及多色印刷，其主要针对纸品包装领域的网版印刷，该机采用经典的停回转技术，最高运转速度可达到4000张/小时，同时采用了不停机飞达及不停机收纸技术，消除了全自动丝印在上纸和出纸上的时间浪费，整机印刷利用率提升了30%，另外可根据干燥程度单独控制UV灯管的开启，收纸部分采用光电识别控制，全程实现自动化，本产线适合于陶瓷及玻璃花纸、广告、包装印刷、标牌、纺织、电子等行业的丝网印刷。

GST1050 fully automatic rotary screen printing machine, absorbing the mature technology of offset press, the introduction of advanced design and production technology, not only can realize local glazing function of UV light oil, can also to all kinds of UV color to monochrome, multicolor printing, the main network for paper packaging printing, the machine USES the classic stop turning technology. Highest running speed can reach 4000 pieces per hour, at the same time adopted a non-stop flight and non-stopping rolling technology, the paper eliminates the fully automatic screen printing on paper and paper waste of time, the whole machine printing efficiency increased by 30%, and according to the degree of dry separate control with IV tubes of open, closed paper part adopts photoelectric identification control, automation. This production line is suitable for ceramic and glass flowered paper, advertising, packaging printing, signage, textile, electronic and other industries of screen printing.

Model 型号	GST720/800	GST900	GST1050	GST1300	GST1450
Max. Paper Size (mm) 最大纸张尺寸	720/800X520	900X650	1050x900	1350x900	1450X1100
Min. Paper. Size(mm) 最小纸张尺寸	350X270	350X270	560X350	560x350	700X500
Max. Printing Area(mm) 最大印刷尺寸	760X510	880X630	1050x800	1300x800	1450X1050
Paper thickness(g/m²) 纸张克重	90-250	90-250	90-420	90-450	128-300
Printing Speed(p/h) 印刷速度	400-3500	400-3200	500-4000	500-4000	600-2800
Screen Frame Size(mm) 网框尺寸	880X880/940X940	1120X1070	1300X1170	1550x1170	1700X1570
Total Power(kw) 总功率	9	9	12	13	13
Total Weight(kg) 总重量	3500	3800	5500	5850	7500
Exterior Dimension(mm) 外形尺寸	3200X2240X1680	3400X2750X1850	3800X3110X1750	3800x3450x1500	3750X3100X1750mm

GSP Series Automatic swing cylinder Screen Printing machine

GSP系列全自动往复式丝网印刷机

Model 型号	GSP780	GSP1060	GSP1650
Max. Paper Size (mm) 最大纸张尺寸	780X540	1060X740	1700X1350
Min. Paper. Size(mm) 最小纸张尺寸	350X270	500X350	750X500
Max. Printing Area(mm) 最大印刷面积	780X520	1020X720	1650X1200
Paper thickness(gsm) 纸张克重	90-350	120-350	160-320
Printing Speed(p/h) 印刷速度	500-3300	500X3000	600X2000
Screen Frame Size(mm) 网版尺寸	940X940	1280X1140	1920×1630
Total Power(kw) 总功率	7.8	8.2	18
Total Weight(kg) 总重量	3800	4500	5800
Exterior Dimension(mm) 外形尺寸	3100X2020X1270	3600X2350X1320	7250×2650×1700（含预堆纸）

GUV/IR Series Multi-function IR/UV dryer

GUV/IR系列紫外线UV光固机



Characteristic 主要特点

- 本机广泛应用于纸张、印刷线路板、电子元器件、仪表表牌等印刷行业及其他需要紫外线光固机场合；
- 利用特定波长对紫外线油墨进行光固化从而形成固态薄膜，使印刷表面达到高硬度、高光泽、耐磨擦、耐溶剂之效果；
- 输送网带采用美国铁氟龙（TEFLON）玻璃纤维耐涂层，耐高温、耐磨擦、耐辐射；
- 采用变频无极调速，转动平稳，适用于手工印刷、半自动多机印刷及高速自动机印刷等多种印刷模式；
- 通过二套风机系统，使印品紧贴网带不至于漂移，并将大量热量排出机外；
- 设有单箱单灯工作、多箱多灯工作无极调光10%~100%功率多种选择模式，延长灯管寿命，又可节省能源；
- 从动辊轴承座处设有网布纠偏机构，可灵活调节；
- This dryer is widely used of drying UV ink printed on paper, PCB, PEC and nameplate for instruments.
- It uses a special wavelength to solidify the UV ink. Through this reaction, it can give the printing surface increased hardness, brightness, and anti-attribution and anti-solvent features.
- The conveyor belt is made of TEFLON imported from America; it can endure high temperatures, attrition and radiation.
- The stepless speed-adjusting device makes for easy and steady operation. It is available in many printing modes: handwork, semi-automatic and high-speed automatic printing.
- Through the two sets of the air-blower system, the paper will adhere to the belt firmly.
- The machine can work in many modes: single-lamp, multi-lamp or eps stepless adjustment from 10%~100%, which can save electric power and extend the lamp life.
- The machine has a stretching device and a automatic rectifying device. They can be adjusted easily.

Technical parameter 技术参数

Model 型号	GUV900	GUV1060	GUV1300	GUV1450	GUV1650
Max. conveying width(mm) 最大输送尺寸	900	1100	1400	1500	1700
Conveyor Belt Speed(m/min) 输送速度	0-65	0-65	0-65	0-65	0-65
IR Lamp QTY(kw x pcs) 红外灯管	2.5X2	2.5X2	2.5X2	2.5X2	2.5X2
UV Lamp QTY(kw x pcs) 紫外灯管	8X3	10X3	13X3	13X3	15X3
Total Power(kw) 总功率	33	39	49	49	53
Total Weight(kg) 总重量	800	1000	1100	1300	1300
Exterior Dimension(mm) 外形尺寸	4500X1665X1220	4500X1815X1220	4500X2000X1220	4500X2115X1220	4500X2315X1220

GLT Series Cold foil stamping machine

GLT系列冷烫机



该设备与半自动丝印机/全自动丝印机连接，完成冷烫工艺。
该印刷工艺应用范围广泛，适用于烟酒包装、化妆品、药盒、礼品盒等，在提高印刷质量和效果方面具有很大潜力，越来越受到市场的欢迎。

The equipment is connected with semi-automatic screen printing machine/full-automatic screen printing machine to complete the cold stamping process.
The printing process has a wide range of applications, which is suitable for tobacco and alcohol packaging, cosmetics, medicine boxes, gift boxes, and has great potential in improving the quality and effect of printing and becoming more and more popular in the market.

Technical parameter 技术参数

Model 型号	GLT1060	GLT1300	GLT1450
Max. working width(mm) 最大工作宽度	1100	1400	1500
Min. working size(gsm) 最小工作宽度	350mm	350mm	350mm
Weight of paper(gsm) 纸张克重	157-450	157-450	157 -450
Max. diameter of film material(mm) 最大卷径	Φ200	Φ200	Φ200
Max. delivery speed (Pcs/h) 最大输送速度	4000 pcs/h (cold foil stamping working speed 500-1200pcs/h)		
Total Power(kw) 总功率	14.5	16.5	16
Total Weight(kg) 总重量	≈700	≈1000	≈1100
Exterior Dimension(mm) 外形尺寸	2000X2100X1460	2450X2300X1460	2620X2300X1460